


PTH

PARIS TEXAS
HARDWARE

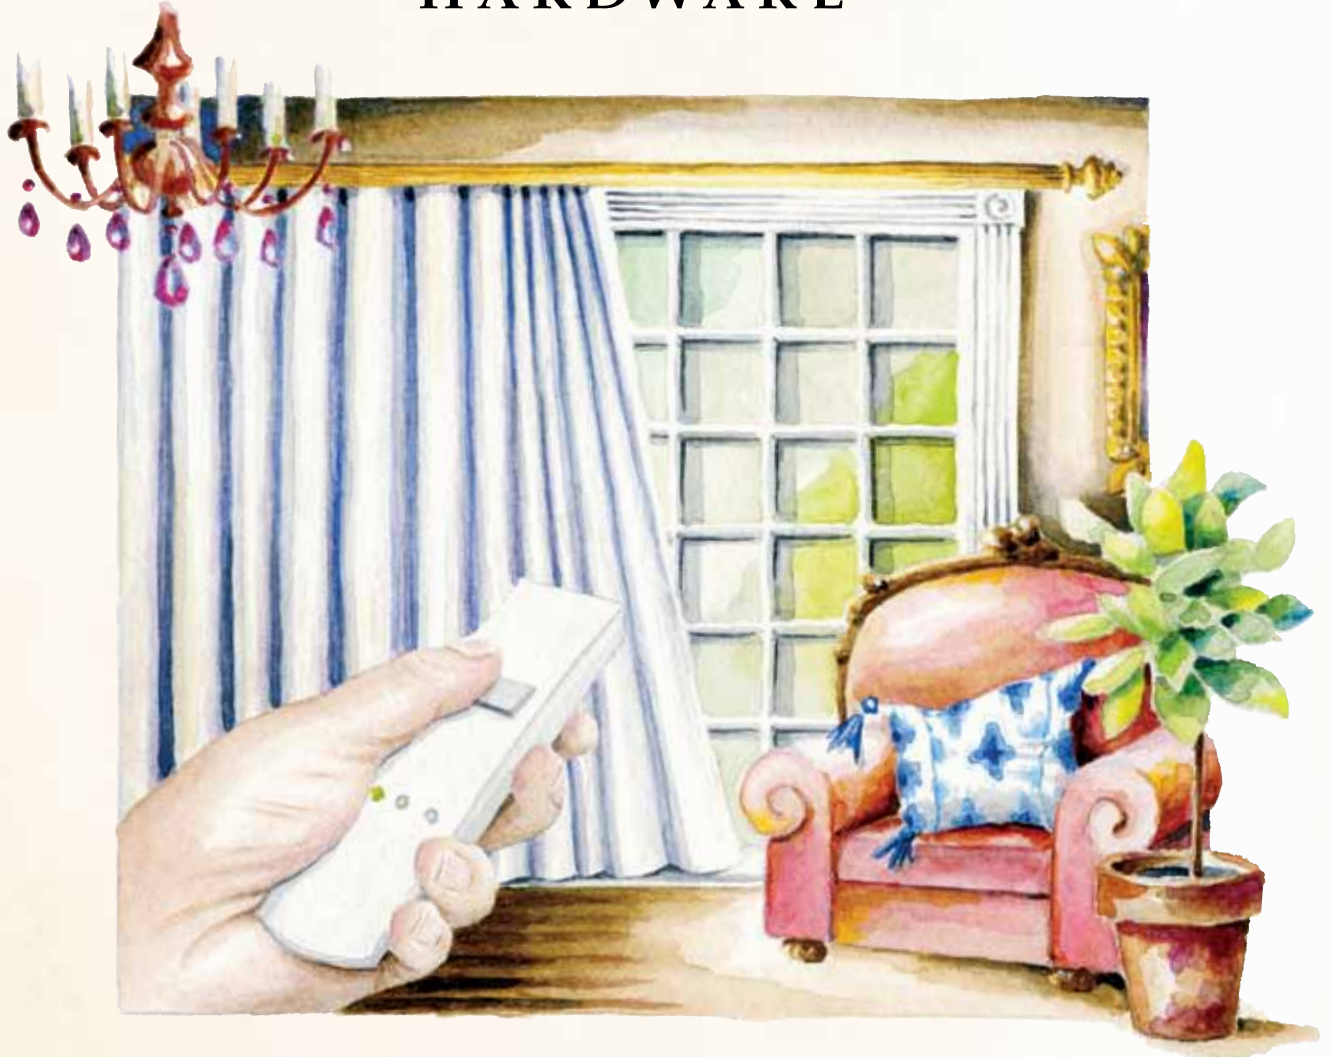

MOTORIZED TRAVERSE

TRADITION MEETS TECHNOLOGY

Take your window treatment forward
in 3 easy steps!

PTH TRADITION MEETS TECHNOLOGY

- individual or multi-system control
- continuous track up to 20'; spliced lengths up to 40'
- wireless wall control available
- plug and play power supply for standard wall outlets (110V or 220V AC)
- network integration via built-in contact-closure port
- manual override and touch control

Take your window treatment forward in 3 easy steps!

1. choose a style

2" and 2 1/4" diameter Portfolio
Somerset and Villiers Quick Ship
smooth and fluted fascia
36 PTH finishes, plus PTH Perfect Match™

2. choose a motor

3 BTX DC motors
2 Somfy Glydea™ motors

3. choose a carrier

standard pinch pleat
Ripplefold® style

BTX DC MOTORIZED TRAVERSE SYSTEM



Shown: 2 1/4" Fluted Fascia and Lyon Finial in Dusty Antique Gold, single BTX-DC-60 motorized system, pinch pleat

- color-coordinated track, brackets, components
- standard 60lb. motor, heavy duty 120lb. motor, and solar powered 45lb. motor available
- tandem motors for increased weight capacity
- standard pinch pleat, Graber® Rollpleat style, or Kirsch Ripplefold® style carriers available
- new Ripplefold® style master carrier allows continuous rippling effect

SOMFY GLYDEA™ RANGE MOTORIZED TRAVERSE SYSTEM



Shown: 2" Smooth Fascia and Mariele Finial in Andiron, single Glydea 35® motorized system, Ripplefold®, 100% fullness

- color-coordinated track and brackets; components are white
- standard 77lb. motor or heavy duty 120lb. motor available
- can integrate with other Somfy motorized products
- My Position (set your favorite drapery position)
- standard pinch pleat or Kirsch Ripplefold® style carriers available
- table top control, sun sensor, programmable timer with on-screen display available

Gold

Bronze


White

Standard colors for BTX and Somfy track and brackets. BTX components available in all three colors. Somfy components available in white only.

© Copyright August 2011 by The Finial Company. All rights reserved. Paris Texas Hardware is a registered trademark of The Finial Company. Graber is a registered trademark of Springs Window Fashions, Inc. Ripplefold is a registered trademark of Kirsch, Inc.



PARIS TEXAS
HARDWARE

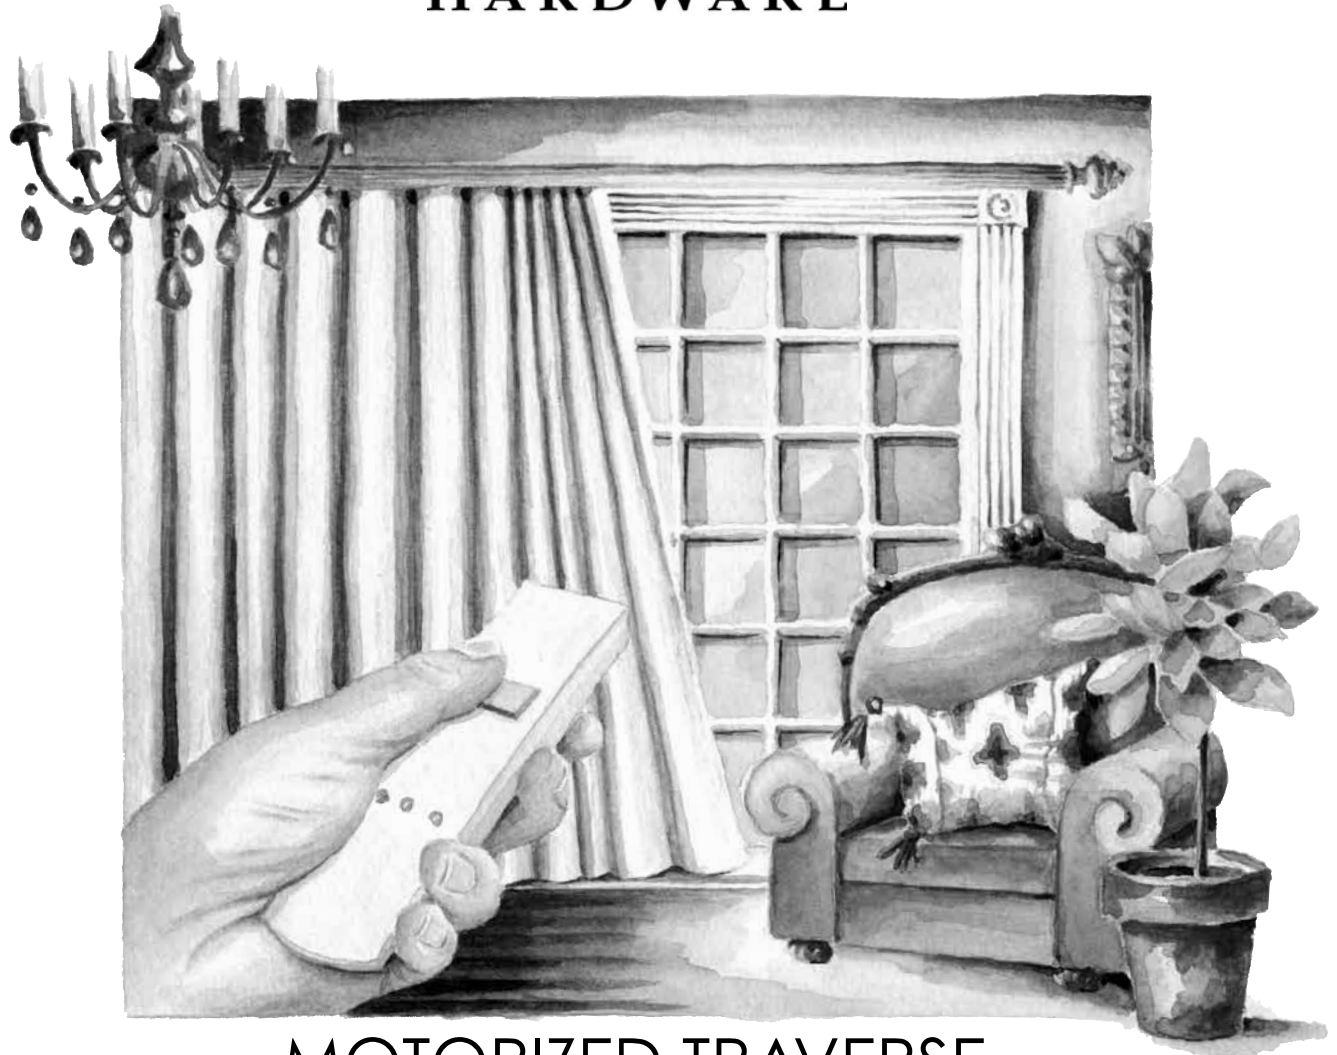

MOTORIZED TRAVERSE
PRODUCT INFORMATION GUIDE
AUGUST 2011

1. Choose a style

Track

- Track available in Gold, Bronze or White
- Continuous track up to 20', spliced lengths up to 40' *(system lengths may vary, see page 4 for details)*
- Center Draw or One-way Draw
- Track without fascia can be curved for an additional fee, please see price list

Configurations

Single with Fascia



Single with Mitered Return Fascia



Single without Fascia



Brackets

- Single: BTX 3 1/8"; Somfy 3 5/8"
- Double: BTX 1 7/8" back, 5 1/8" front; Somfy 2 1/2" back, 5 5/8" front *(double bracket can be used for single system; no additional charge; must be requested on order)*

Fascia

- Fascia available in any Somerset, Villiers, Portfolio or PTH Perfect Match™ finish
- 2" dia fascia available in smooth
- 2 1/4" dia fascia available in fluted or smooth
- Fascia spliced at 45° angle unless otherwise specified
- Choose any coordinating PTH finial; sold separately

Double with Fascia (front and back option shown)



Double with Mitered Return Fascia




Double without Fascia




Single and Double without Fascia can be curved for an additional fee:

BTX® DC

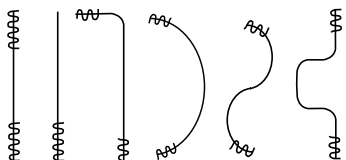

Somfy Glydea™

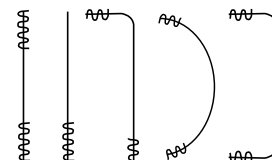

Please note: BTX DC systems can be curved with a minimum 18" radius for pinch pleat, 20" minimum radius for Ripplefold® style. Somfy Glydea™ systems can be curved with a minimum 11.8" radius. All curves require a template. **Curving track reduces weight capacity of motor. Please refer to motor specifications on pg. 4.**

Finishes

Based on your specified PTH finish, we supply components that best match the color of your fascia, unless otherwise specified. Please refer to your Finish Reference Guide below. If you order a PTH Perfect Match™ finish, please specify your track and component color.

- Components include: carriers, master carriers, drive gears, return hooks and fascia clips
- Fascia options: 2 1/4" dia fluted or smooth, 2" dia smooth
- Spliced fascia will be cut with a 45° angle for an obscure splice
- Wood glue is not included and must be supplied by the installer
- Track and fascia will be spliced at center of total length
- Blended fascia is available for an additional fee per splice; PTH will properly connect splice(s) and ship your fascia in one continuous length

Finish Name	BTX DC Track, Bracket & Component Colors	Somfy Glydea™ Track & Bracket Colors (all Somfy components are white only)	2 1/4" Fluted Pole	2 1/4" Smooth Pole	2" Smooth Pole	Maximum Continuous Fascia Length
Portfolio Finishes						
Andiron	Bronze	Bronze	•	•	•	16'
Antique Gold	Gold	Gold	•	•	•	16'
Antique Gold Leaf	Gold	Gold	•	•	•	16'
Antique Gold with Mahogany	Gold	Gold	•	•	•	16'
Art Bronze	Bronze	Bronze	•	•	•	16'
Avignon	Gold	Gold	•	•	•	16'
Black Forest	Bronze	Bronze	•	•	•	16'
Black Russian	Bronze	Bronze	•	•	•	16'
Branchwood	Bronze	Bronze	•	•	•	16'
Dusty Antique Gold	Gold	Gold	•	•	•	16'
Dusty Antique Gold with Mahogany	Gold	Gold	•	•	•	16'
English Manor	Bronze	Bronze	•	•	•	16'
Gossamer	Bronze	Bronze	•	•	•	16'
Iron Gate	Bronze	Bronze	•	•	•	16'
Ivory	White	White	•	•	•	16'
Java	Bronze	Bronze	•	•	•	16'
Latte	White	White	•	•	•	16'
Mahogany	Bronze	Bronze	•	•	•	16'
New Age Bronze	Bronze	Bronze	•	•	•	16'
Old Brick	Bronze	Bronze	•	•	•	16'
Titanium	Bronze	Bronze	•	•	•	16'
Tudor	Bronze	Bronze	•	•	•	16'
Umber	Bronze	Bronze	•	•	•	16'
Urban Bronze	Gold	Gold	•	•	•	16'
PTH Perfect Match™						
	Please Specify	Please Specify	•	•	•	16'
Somerset Finishes						
Creamy Gold	Gold	Gold	•			12'
Glow	Bronze	Bronze	•			12'
Limestone	Gold	Gold	•			12'
Luster Copper	Bronze	Bronze	•			12'
Mottled Gold	Gold	Gold	•			12'
Wood Crackle	Bronze	Bronze	•			12'
Villiers Finishes						
Bronze d'Ore	Gold	Gold			•	12'
Chestnut	Bronze	Bronze			•	12'
Noir	Bronze	Bronze			•	12'
Rosewood	Bronze	Bronze			•	12'

Please Note: BTX DC motor is always white; Somfy Glydea™ motor is always silver

2. Choose a motor

Be sure to select the best motor for your window treatment. Use the Motor Weight Capacity chart below to determine which motor best accommodates your length of track and your drapery weight. The System Features chart on the opposite page lists the varied functions of each motor.


Motor Weight Capacity

	Motor	maximum drapery weight per total length of system (lbs)											
		18' or less	20'	22'	24'	26'	28'	30'	32'	34'	36'	38'	40'
BTX®	Standard BTX-DC-60 Tandem	60 120	58 118	56 116	54 114	52 112	50 110	48 108	46 106	44 104	42 102	40 100	38 98
	Heavy Duty BTX-DC-120 Tandem	120 240	118 238	116 236	114 234	112 232	110 230	108 228	106 226	104 224	102 222	100 220	98 218
	Solar BTX-DCS-45 Tandem	45 90	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -	- -
somfy®	Standard Glydea™ 35	77	77	77	77	77	77	77	77	-	-	-	-
	Heavy Duty Glydea™ 60e Tandem	132 220	132 220	132 220	132 220	132 220	132 220	132 220	132 220	132 -	132 -	- -	- -


Note: Capacity ratings are based on internal system friction only. External loads caused by fabric friction, drag, or obstructions will adversely affect pulling capacity or stop motor due to resistance. **Curving:** System curves reduce maximum drapery weight capacity by a minimum of 15% per bend. Please call us regarding weight capacity for your curved track. **Maximum System Lengths:** If you need more than the maximum spliced length for a system, two one-way systems can butt against each other behind fascia. Must be specified on your order form. An additional arm component is needed to create an overlap between the two individual systems; sold separately.

Motorized Traverse System

includes 1 motor with power supply (1 per track), track(s) with components, brackets, and 1 standard transmitter (1 per track), and fascia with fascia clips when applicable. Somfy transformers are within the Somfy motor housing.

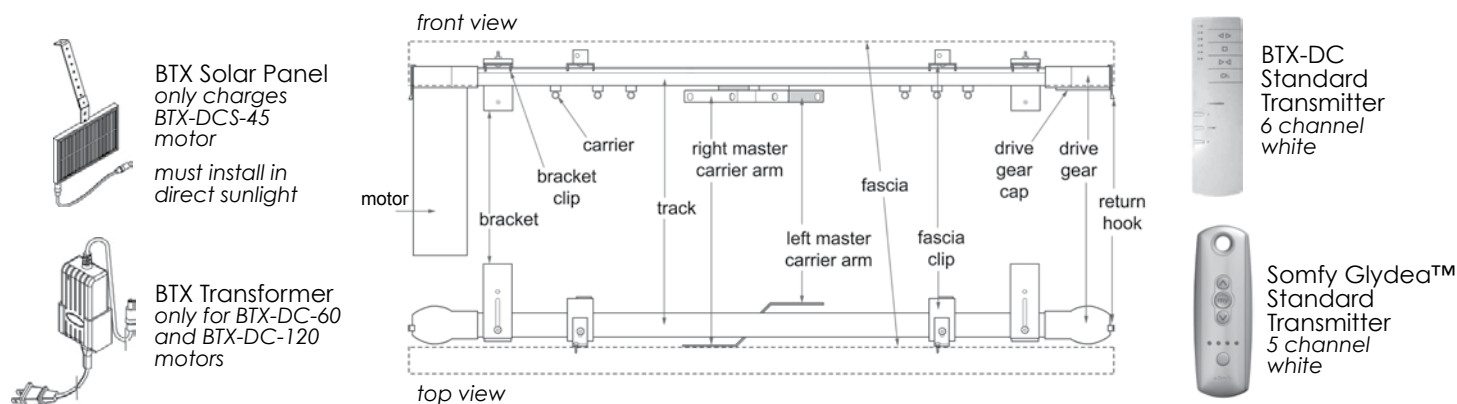

Additional Controls and Accessories can be ordered at additional cost

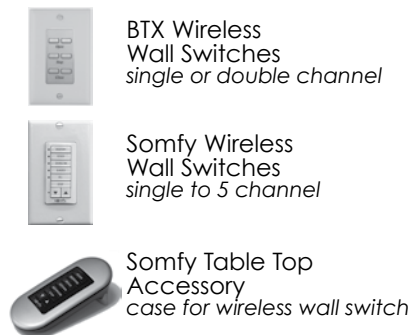

System Features	BTX®DC Motors			Somfy Glydea™ Motors	
	Standard	Heavy Duty	Solar	Standard	Heavy Duty
System Features	BTX-DC-60	BTX-DC-120	BTX-DCS-45	Glydea™ 35	Glydea™ 60e
center draw or one-way draw available	X	X	X	X	X
Bronze or Gold track available	X	X	X	X	X
Bronze or Gold components* available	X	X	X		
White track available	X	X	X	X	X
White components* available	X	X	X	X	X
track maximum length	40'	40'	18'	32'	36'
maximum number of track splices	1	1	0	1	1
minimum curving radius	18" (45.72 CM)	18" (45.72 CM)	18" (45.72 CM)	11.8" (30 CM)	11.8" (30 CM)
Bronze, Gold or White wall mount brackets (sgl & dbl)	X	X	X	X	X
Bronze or Gold standard ceiling mount bracket	X	X	X		
White standard ceiling mount bracket	X	X	X	X	X
Motor Features	BTX-DC-60	BTX-DC-120	BTX-DCS-45	Glydea™ 35	Glydea™ 60e
motor cord length as purchased	120"	120"	19"	120"	120"
touch motion	X	X	X		X
manual override	X	X	X	X	X
soft start				X	X
soft stop					X
speed control and adjustment					X
average linear speed	12"/sec	12"/sec	12"/sec	7.8" (20cm)/sec	4.9" (12.5cm) - 7.8" (20cm)/sec
motor automatically stops when system reaches fully open or fully closed position	X	X	X	X	X
adjustable limits					X
intermediate position					My Position
motorized track noise level	53db	59db	53db	50 dB	44 dB
maximum weight	60 lbs / 18 ft	120 lbs / 18 ft	45 lbs / 18 ft	77 lbs / 20 ft	132 lbs / 20 ft
tandem maximum weight	120 lbs / 18 ft	240 lbs / 18 ft	90 lbs / 18 ft	n/a	220 lbs / 20 ft
motor unit can be installed on either end of track	X	X	X	X	X
inverse mounting of motor				X	X
factory reset	X	X	X	X	X
Control Options	BTX-DC-60	BTX-DC-120	BTX-DCS-45	Glydea™ 35	Glydea™ 60e
timer control				X	X
sun control				X	X
3 normally open dry contacts				X	X
2 normally open dry contacts	X	X	X	X	X
2 normally open dry contact sequencing mode	Available with external control (RP Board)			X	X
dry contact individual and group master control	X	X	X	X	X
digital technology	RS232 interface			RS485 interface	
Solar Power			X		
Installation Features	BTX-DC-60	BTX-DC-120	BTX-DCS-45	Glydea™ 35	Glydea™ 60e
programming buttons on motor unit				X	X
power supply	24V Transformer	24V Transformer	5V Solar Panel	120V	
amperage	.6A	1A	<0.2**A	0.5A	1A
power consumption	15W	25W	20W	60 W	120 W
power cable type	3 conductor AC to transformer, 2 conductor DC to motor		2 conductor from motor to panel	3-wire cable	3-wire cable
control connector type	RJ-11	RJ-11	RJ-11	RJ-12	RJ-12
DCT control circuit voltage				3.3 VDC	3.3 VDC
certifications	c UL US Listed, CE, CCC			c TUV us, CCC, CE	
Standard Accessories <i>included with system</i>	BTX-DC-60	BTX-DC-120	BTX-DCS-45	Glydea™ 35	Glydea™ 60e
5 channel transmitter (remote control; white)				X	X
6 channel transmitter (remote control; white)	X	X	X		
Carrier Features	BTX-DC-60	BTX-DC-120	BTX-DCS-45	Glydea™ 35	Glydea™ 60e
bronze or gold pinch pleat carriers	X	X	X		
white pinch pleat carriers	X	X	X	X	X
white Ripplefold® style carriers compatible with Graber® Rollpleat tape (choose 80%, 100%, or 120% fullness)	X	X	X		
white Ripplefold® style carriers compatible with Kirsch Ripplefold® tape (choose 80%, 100%, or 120% fullness)	X	X	X	X	X

*components include: carriers, master carriers, drive gears, return hooks and fascia clips

**maximum allowable charging current


3. Choose a carrier

Standard Pinch Pleat Carrier




Pinch pleat carriers
4 per foot, unless otherwise specified

BTX DC Pinch Pleat

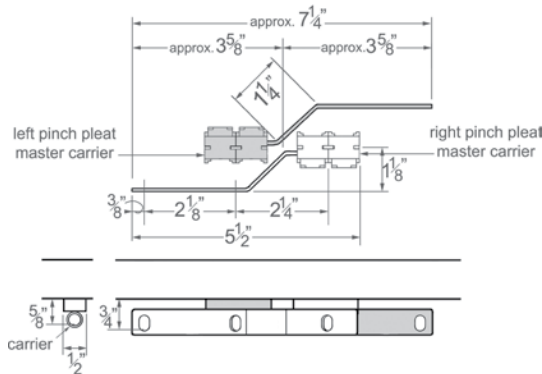

Somfy Glydea™ Pinch Pleat

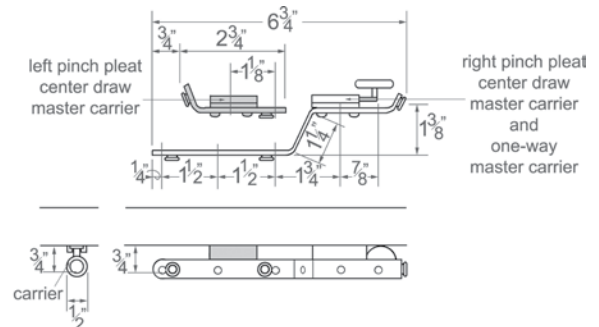

Ripplefold® Style Carrier




Ripplefold® style carriers

80% carrier fullness: 2 3/8" spacing
100% carrier fullness: 2 1/8" spacing
120% carrier fullness: 1 7/8" spacing


Snap tape: 4 1/4" spacing

Snap tape not included with system

BTX DC Ripplefold® style

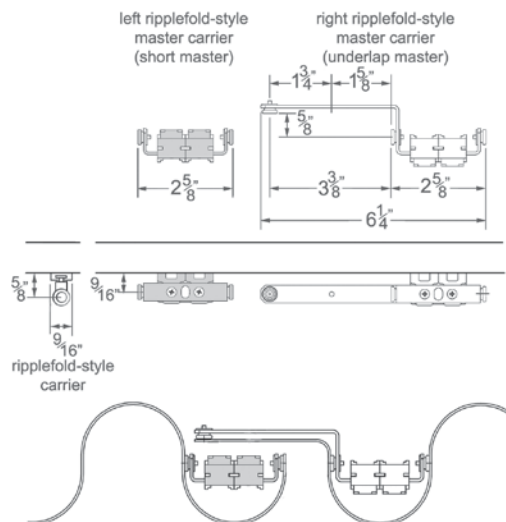

Somfy Glydea™ Ripplefold® style

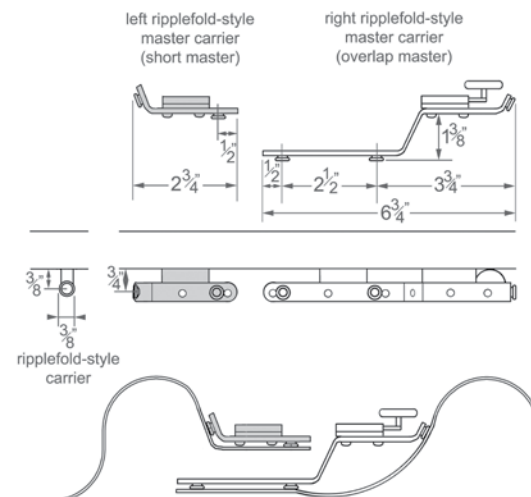

Important: Drapery workroom must apply specific snap tape to drapery panel when using Ripplefold® style carriers.


BTX DC Ripplefold® style carriers are only compatible with Graber® Rollpleat snap tape or Kirsch Ripplefold® snap tape. Other brand snap tapes are NOT COMPATIBLE with the BTX DC Motorized system.

Somfy Glydea™ Ripplefold® style carriers are only compatible with Kirsch Ripplefold® snap tape. Other brand tapes are NOT COMPATIBLE with the Somfy Glydea™ Motorized system.

Graber is a registered trademark of Springs Window Fashions, Inc. Ripplefold is a registered trademark of Kirsch, Inc.

Ripplefold® Style Fabrication

Unique to BTX DC and Somfy Glydea™ Motorized Traverse Systems

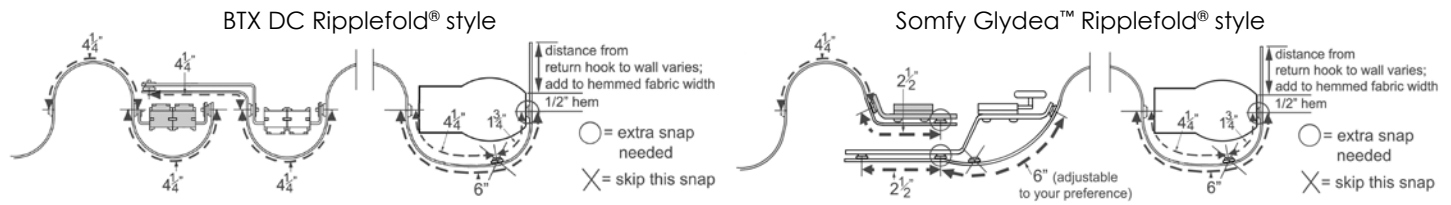

Ripplefold® style Fabrication Chart for BTX DC systems. Use as guideline only; actual window treatments will vary based on style preferences and fabrication methods. Accurate fabric measurements and fabrication methods must be determined by drapery workroom.


System Length		80% Fullness												100% Fullness												120% Fullness															
		Panel Coverage			Center Draw						One-Way Draw						Center Draw						One-Way Draw						Center Draw						One-Way Draw						
		Short Master Carrier (left side)	Underlap Master Carrier (right side)	Underlap Master Carrier (one-way)	Number of Carriers EACH SIDE (2 3/8" spacing)	LEFT SIDE Short Master Carrier (Number of Standard Snaps (4 1/4" spacing))	RIGHT SIDE Underlap Master Carrier (Number of Standard Snaps (4 1/4" spacing))	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)	Number of Carriers EACH SIDE (2 3/8" spacing)	Number of Standard Snaps (4 1/4" spacing)	Hemmed Fabric Width* (inches)		
Feet	Inches																																								
6	72	36	40	72	14	16	69 5/8	17	73 7/8	27	30	132 1/4	15	17	76 1/2	18	80 3/4	31	34	146	17	19	85 1/4	20	89 1/2	35	38	163 3/8													
7	84	42	46	84	16	18	80 3/8	19	84 5/8	33	36	153 3/4	18	20	88 1/2	21	92 3/4	36	39	170	21	23	98 3/4	24	103	41	44	190 5/8													
8	96	48	52	96	19	21	91 1/8	22	95 3/8	38	41	175 1/4	21	23	100 1/2	24	104 3/4	42	45	194	24	26	112 3/8	27	116 5/8	48	51	217 3/4													
9	108	54	58	108	21	23	101 7/8	24	106 1/8	43	46	196 5/8	24	26	112 1/2	27	116 3/4	48	51	218	27	29	126	30	130 1/4	54	57	245													
10	120	60	64	120	24	26	112 5/8	27	116 7/8	48	51	218 1/8	27	29	124 1/2	30	128 3/4	53	56	242	30	32	139 5/8	33	143 7/8	60	63	272 1/4													
11	132	66	70	132	26	28	123 3/8	29	127 5/8	53	56	239 5/8	29	31	136 1/2	32	140 3/4	59	62	266	33	35	153 1/4	36	157 1/2	67	70	299 3/8													
12	144	72	76	144	29	31	134	32	138 1/4	58	61	261 1/8	32	34	148 1/2	35	152 3/4	65	68	290	37	39	166 3/4	40	171	73	76	326 5/8													
13	156	78	82	156	31	33	144 3/4	34	149	63	66	282 5/8	35	37	160 1/2	38	164 3/4	70	73	314	40	42	180 3/8	43	184 5/8	80	83	353 3/4													
14	168	84	88	168	34	36	155 1/2	37	159 3/4	68	71	304	38	40	172 1/2	41	176 3/4	76	79	338	43	45	194	46	198 1/4	86	89	381													
15	180	90	94	180	36	38	166 1/4	39	170 1/2	73	76	325 1/2	41	43	184 1/2	44	188 3/4	82	85	362	46	48	207 5/8	49	211 7/8	92	95	408 1/4													
16	192	96	100	192	39	41	177	42	181 1/4	78	81	347	44	46	196 1/2	47	200 3/4	87	90	386	49	51	221 1/4	52	225 1/2	99	102	435 3/8													
17	204	102	106	204	42	44	187 3/4	45	192	83	86	368 1/2	46	48	208 1/2	49	212 3/4	93	96	410	53	55	234 3/4	56	239	105	108	462 5/8													
18	216	108	112	216	44	46	198 1/2	47	202 3/4	88	91	390	49	51	220 1/2	52	224 3/4	98	101	434	56	58	248 3/8	59	252 5/8	112	115	489 3/4													
19	228	114	118	228	47	49	209 1/4	50	213 1/2	93	96	411 3/8	52	54	232 1/2	55	236 3/4	104	107	458	59	61	262	62	266 1/4	118	121	517													
20	240	120	124	240	49	51	220	52	224 1/4	98	101	432 7/8	55	57	244 1/2	58	248 3/4	110	113	482	62	64	275 5/8	65	279 7/8	124	127	544 1/4													
21	252	126	130	252	52	54	230 5/8	55	234 7/8	103	106	454 3/8	58	60	256 1/2	61	260 3/4	115	118	506	65	67	289 1/4	68	293 1/2	131	134	571 3/8													
22	264	132	136	264	54	56	241 3/8	57	245 5/8	108	111	475 7/8	61	63	268 1/2	64	272 3/4	121	124	530	69	71	302 3/4	72	307	137	140	598 5/8													
23	276	138	142	276	57	59	252 1/8	60	256 3/8	113	116	497 3/8	63	65	280 1/2	66	284 3/4	127	130	554	72	74	316 3/8	75	320 5/8	144	147	625 3/4													
24	288	144	148	288	59	61	262 7/8	62	267 1/8	118	121	518 3/4	66	68	292 1/2	69	296 3/4	132	135	578	75	77	330	78	334 1/4	150	153	653													
25	300	150	154	300	62	64	273 5/8	65	277 7/8	123	126	540 1/4	69	71	304 1/2	72	308 3/4	138	141	602	78	80	343 5/8	81	347 7/8	156	159	680 1/4													
26	312	156	160	312	64	66	284 3/8	67	288 5/8	129	132	561 3/4	72	74	316 1/2	75	320 3/4	144	147	626	81	83	357 1/4	84	361 1/2	163	166	707 3/8													
27	324	162	166	324	67	69	295 1/8	70	299 3/8	134	137	583 1/4	75	77	328 1/2	78	332 3/4	149	152	650	85	87	370 3/4	88	375	169	172	734 5/8													
28	336	168	172	336	69	71	305 7/8	72	310 1/8	139	142	604 5/8	77	79	340 1/2	80	344 3/4	155	158	674	88	90	384 3/8	91	388 5/8	176	179	761 3/4													
29	348	174	178	348	72	74	316 5/8	75	320 7/8	144	147	626 1/8	80	82	352 1/2	83	356 3/4	161	164	698	91	93	398	94	402 1/4	182	185	789													
30	360	180	184	360	74	76	327 3/8	77	331 5/8	149	152	647 5/8	83	85	364 1/2	86	368 3/4	166	169	722	94	96	411 5/8	97	415 7/8	188	191	816 1/4													
31	372	186	190	372	77	79	338	80	342 1/4	154	157	669 1/8	86	88	376 1/2	89	380 3/4	172	175	746	97	99	425 1/4	100	429 1/2	195	198	843 3/8													
32	384	192	196	384	79	81	348 3/4	82	353	159	162	690 5/8	89	91	388 1/2	92	392 3/4	178	181	770	101	103	438 3/4	104	443	201	204	870 5/8													
33	396	198	202	396	82	84	359 1/2	85	363 3/4	164	167	712	92	94	400 1/2	95	404 3/4	183	186	794	104	106	452 3/8	107	456 5/8	208	211	897 3/4													
34	408	204	208	408	84	86	370 1/4	87	374 1/2	169	172	733 1/2	94	96	412 1/2	97	416 3/4	189	192	818	107	109	466	110	470 1/4	214	217	925													
35	420	210	214	420	87	89	381	90	385 1/4	174	177	755	97	99	424 1/2	100	428 3/4	194	197	842	110	112	479 5/8	113	483 7/8	220	223	952 1/4													
36	432	216	220	432	90	92	391 3/4	93	396	179	182	776 1/2	100	102	436 1/2	103	440 3/4	200	203	866	113	115	493 1/4	116	497 1/2	227	230	979 3/8													
37	444	222	226	444	92	94	402 1/2	95	406 3/4	184	187	798	103	105	448 1/2	106	452 3/4	206	209	890	117	119	506 3/4	120	511	233	236	1006 5/8													
38	456	228	232	456	95	97	413 1/4	98	417 1/2	189	192	819 3/8	106	108	460 1/2	109	464 3/4	211	214	914	120	122	520 3/8	123	524 5/8	240	243	1033 3/4													
39	468	234	238	468	97	99	424	100	428 1/4	194	197	840 7/8	109	111	472 1/2	112	476 3/4	217	220	938	123	125	534	126	538 1/4	246	249	1061													
40	480	240	244	480	100	102	434 5/8	103	438 7/8	199	202	862 3/8	111	113	484 1/2	114	488 3/4	223	226	962	126	128	547 5/8	129	551 7/8	252	255	1088 1/4													
For lengths beyond an even foot:		Add 1 carrier every 2 3/8" of track; add 4 1/4" fabric width for each additional carrier												Add 1 carrier every 2 1/8" of track; add 4 1/4" fabric width for each additional carrier												Add 1 carrier every 1 7/8" of track; add 4 1/4" fabric width for each additional carrier															

* Hemmed Fabric Width does not include fabric return (distance from return hook to wall).


Additional Details

Wall Mount Brackets


BTX Single Motorized Bracket
Available in Gold, Bronze or White

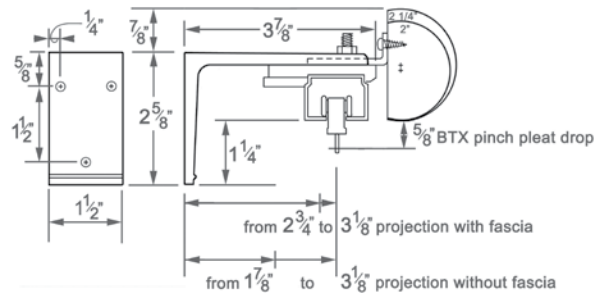


BTX Double Motorized Bracket
Available in Gold, Bronze or White

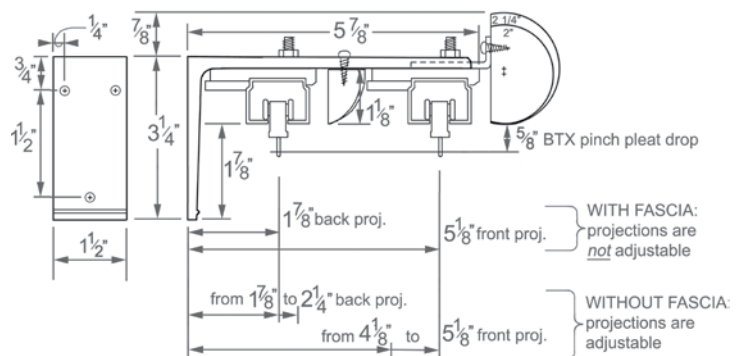


Somfy Single Motorized Bracket
Available in Gold, Bronze or White

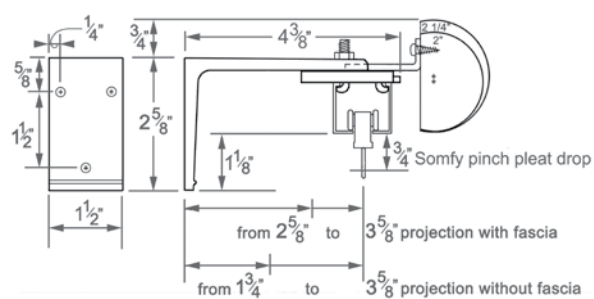

Somfy Double Motorized Bracket
Available in Gold, Bronze or White

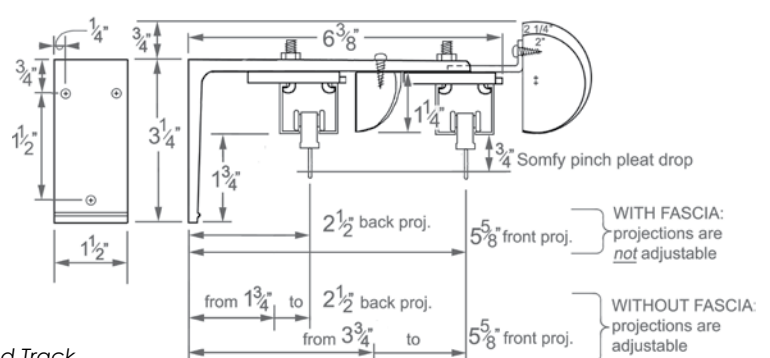

Motorized Over-Bracket
Portfolio finishes only. Sold separately. Use with Single Motorized Track.

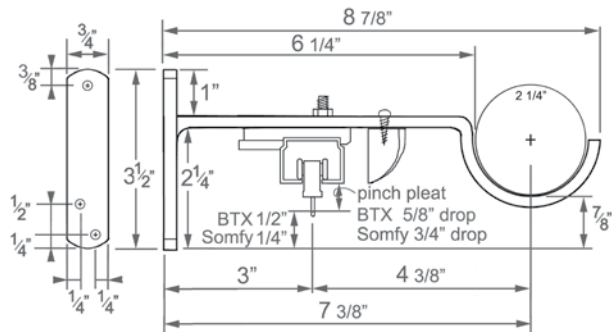


This bracket allows stationary panels on a full 2" or 2 1/4" dia wood pole in front of a single motorized traverse track.


Optional back fascia will be attached to Motorized Over-Bracket. Diagram depicts measurements when back fascia is desired.

Ceiling Mount Brackets


BTX Ceiling Mount Bracket
Available in Gold, Bronze or White

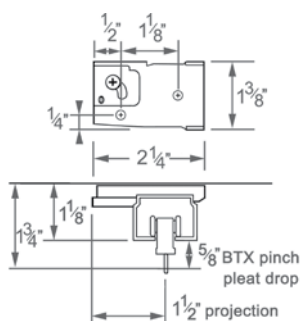

Somfy Ceiling Mount Bracket
Available in White only

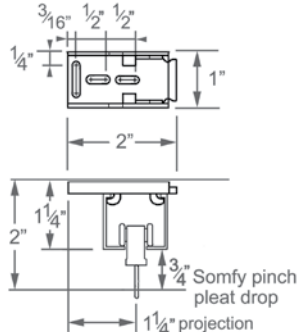

Ceiling Mount Bracket
for System with Fascia
Portfolio finishes only.
Sold separately.
Use with Single
Motorized Track.

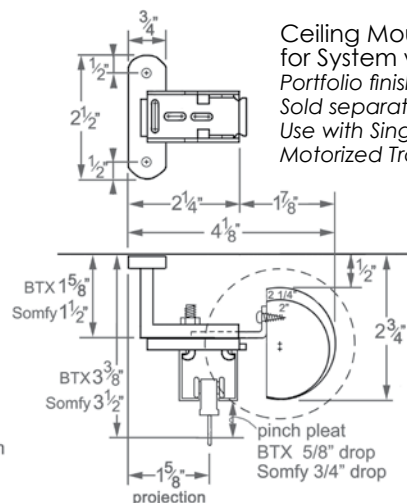

Please note: only Ceiling Mount Bracket for System with Fascia will accommodate fascia and finials.

Quantity per System

	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'	16'
Pinch Pleat Carriers	24	28	32	36	40	44	48	52	56	60	64
Brackets	3	3	3	4	4	4	4	5	5	5	5
Portfolio Fascia Splices *	0	0	0	0	0	0	0	0	0	0	0
Quick Ship Fascia Splices *	0	0	0	0	0	0	0	1	1	1	1
Track Splices*	0	0	0	0	0	0	0	0	0	0	0

* track and fascia will be spliced in center of overall length

Standard carriers are 4 per foot

Standard brackets are 1 every 4 feet

PTH Motorized Traverse Tips

- Specified custom cut length indicates track length including drive gears; fascia will be 1/4" longer at each end of track (1/2" total); mitered fascia will be 1 1/2" longer at each end of track (3" total).
- Track and fascia will be spliced in the center of overall length.
- Blended fascia is available for an additional fee per blend; PTH will properly connect splice(s) and ship your fascia in one continuous length.
- Back fascia can accommodate decorative end caps; decorative end caps sold separately.
- Both BTX and Somfy Motorized Traverse Systems carry a 5 year warranty; **WARNING:** Modifications of internal components will void BTX and Somfy warranties.

Motorized Stack Back Calculation (each drapery panel)

BTX: master carrier + (# carriers on panel x carrier width) + 3.375" = stack per drapery panel

Somfy: master carrier + (# carriers on panel x carrier width) + 3.75" = stack per drapery panel

Ex: Somfy 10ft. center draw, pinch pleat (standard 4 carriers per ft.)

2.75" + [(40/2) x .5"] + 3.75" = 16.5" stack, short master panel *BEFORE* drapery fabric is installed

6.75" + [(40/2) x .5"] + 3.75" = 20.5" stack, overlap master panel *BEFORE* drapery fabric is installed

Ex: BTX 20 ft. one-way draw, Ripplefold® style 80% fullness

6.25" + (98 x .563") + 3.375" = 64.79" stack, underlap master panel *BEFORE* drapery fabric is installed

Please note: Calculations result in stack back width *BEFORE* drapery fabric is installed. Stack back width will increase once draperies are installed. Factors such as thickness of drapery fabric, type of drapery pleat, and fullness of treatment affect the final stack back width. Please consult your workroom to determine your final stack back based on your draperies.

Motorized Traverse Pricing

Item #	Name	Color	Price
--------	------	-------	-------

Somfy Motors

1001615	Somfy Glydea™ 35 Std Motor		\$ 885.00
1001617	Somfy Glydea™ 60e Heavy Duty Motor		\$1100.00

Somfy Accessories

Transmitters/Devices

1810633	Standard Transmitter-5 channel	White	\$225.00
1810639	Transmitter-5 channel	Silver	\$300.00
1810652	Transmitter-5 channel	Black	\$300.00
1810632	Transmitter-1 channel	White	\$175.00
1810639	Transmitter-1 channel	Silver	\$250.00
1810650	Transmitter-1 channel	Black	\$250.00
1811081	Transmitter-16 channel	White	\$600.00
1811082	Transmitter-16 channel	Silver	\$650.00
1810897	Wireless Wall Switch-1 channel	White	\$350.00
1810898	Wireless Wall Switch-1 channel	Ivory	\$350.00
1810899	Wireless Wall Switch-1 channel	Black	\$375.00
1811180	Wireless Wall Switch-1 channel	Almond	\$350.00
1810813	Wireless Wall Switch-5 channel	White	\$365.00
1810814	Wireless Wall Switch-5 channel	Ivory	\$365.00
1810830	Wireless Wall Switch-5 channel	Black	\$390.00
1811181	Wireless Wall Switch-5 channel	Almond	\$365.00
1811185	Table Top Accessory *	White	\$120.00
1810972	Table Top Accessory *	Silver	\$120.00
1811051	Table Top Accessory *	Black	\$120.00

* use with Wireless Wall Switch

Programmable Timers

1805217	Handheld Timer-6 channel	White	\$785.00
1805218	Handheld Timer-6 channel	Silver	\$800.00
1805176	Wall Mount Timer	Almond	\$475.00
9013707	Sunis Indoor Sun Control	Almond	\$550.00

Carrier

1780892	Somfy Std Pinch Pleat Carrier	White	\$2.50
---------	-------------------------------	-------	--------

Brackets

PO214MCBKS	Ceiling Mount Bracket for System with Fascia	Portfolio	\$51.00
PO214MOCBKS	Motorized Over-Bracket	Portfolio	\$35.00
1780907	Somfy Ceiling Mount Bracket	White	\$10.00

Somfy Additional Fees

Curving fee (templates must be provided)	Quoted
--	--------

Item #	Name	Color	Price
--------	------	-------	-------

BTX Motors

101.9010	BTX-DC-60 Std Motor *		\$585.00
101.9020	BTX-DC-120 Heavy Duty Motor *		\$900.00
102.9000	BTX-DCS-45 Solar Motor **		\$875.00

* Transformer is included

** Solar panel is included

BTX Accessories

Transmitters/Devices

490.2076	BTX DC Std Transmitter (6 channel)	White	\$150.00
480.3040	BTX Wireless Wall Switch (1 channel)	White	\$150.00
480.3045	BTX Wireless Wall Switch (2 channel)	White	\$200.00

Carrier

240.7505	BTX Std Pinch Pleat Carrier	WH, GO, BR	\$2.50
----------	-----------------------------	------------	--------

Brackets

PO214MCBKB	Ceiling Mount Bracket for System with Fascia	Portfolio	\$51.00
PO214MOCBKB	Motorized Over-Bracket	Portfolio	\$35.00
236.1610	BTX Ceiling Mount Bracket	White	\$10.00

BTX Additional Fees

Curving Fee (per bend; template must be provided)	\$175.00
Handling and crating fee for curved tracks	\$75.00

Somfy-BTX | Additional Options & Upgrades

Ripplefold® style upgrade	10% system upcharge
Blended fascia splice per splice	NET PRICING \$75.00
Miter cuts 3 5/8" or 5 5/8" return per pair	NET PRICING \$50.00
Packaging fee per order	NET PRICING \$25.00


Item #	Name	Price												
--------	------	-------	--	--	--	--	--	--	--	--	--	--	--	--

Motorized Traverse System with Wood Fascia

Single Track System with Wood Fascia														
	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'	16'	per add'l ft		
BM01	BTX-DC-60 Std Motor	\$1,594	\$1,673	\$1,752	\$1,831	\$1,910	\$1,989	\$2,068	\$2,147	\$2,226	\$2,305	\$2,384	\$79	
	BTX-DC-120 Heavy Duty Motor	\$2,082	\$2,161	\$2,240	\$2,319	\$2,398	\$2,477	\$2,556	\$2,635	\$2,714	\$2,793	\$2,872	\$79	
	BTX-DCS-45 Solar Motor	\$1,881	\$1,960	\$2,039	\$2,118	\$2,197	\$2,276	\$2,355	\$2,434	\$2,513	\$2,592	\$2,671	\$79	
SM01	Somfy Glydea™ 35 Std Motor	\$2,043	\$2,134	\$2,225	\$2,316	\$2,407	\$2,498	\$2,589	\$2,680	\$2,771	\$2,862	\$2,953	\$91	
	Somfy Glydea™ 60e Heavy Duty Motor	\$2,393	\$2,484	\$2,575	\$2,666	\$2,757	\$2,848	\$2,939	\$3,030	\$3,121	\$3,212	\$3,303	\$91	
Double Track System with Wood Fascia Front Only														
BM05	BTX-DC-60 Std Motor	\$3,020	\$3,150	\$3,280	\$3,410	\$3,540	\$3,670	\$3,800	\$3,930	\$4,060	\$4,190	\$4,320	\$130	
	BTX-DC-120 Heavy Duty Motor	\$3,996	\$4,126	\$4,256	\$4,386	\$4,516	\$4,646	\$4,776	\$4,906	\$5,036	\$5,166	\$5,296	\$130	
	BTX-DCS-45 Solar Motor	\$3,594	\$3,724	\$3,854	\$3,984	\$4,114	\$4,244	\$4,374	\$4,504	\$4,634	\$4,764	\$4,894	\$130	
SM05	Somfy Glydea™ 35 Std Motor	\$3,918	\$4,071	\$4,224	\$4,377	\$4,530	\$4,683	\$4,836	\$4,989	\$5,142	\$5,295	\$5,448	\$153	
	Somfy Glydea™ 60e Heavy Duty Motor	\$4,618	\$4,771	\$4,924	\$5,077	\$5,230	\$5,383	\$5,536	\$5,689	\$5,842	\$5,995	\$6,148	\$153	
Double Track System with Wood Fascia Front and Back														
BM09	BTX-DC-60 Std Motor	\$3,110	\$3,255	\$3,400	\$3,545	\$3,690	\$3,835	\$3,980	\$4,125	\$4,270	\$4,415	\$4,560	\$145	
	BTX-DC-120 Heavy Duty Motor	\$4,086	\$4,231	\$4,376	\$4,521	\$4,666	\$4,811	\$4,956	\$5,101	\$5,246	\$5,391	\$5,536	\$145	
	BTX-DCS-45 Solar Motor	\$3,684	\$3,829	\$3,974	\$4,119	\$4,264	\$4,409	\$4,554	\$4,699	\$4,844	\$4,989	\$5,134	\$145	
SM09	Somfy Glydea™ 35 Std Motor	\$4,008	\$4,176	\$4,344	\$4,512	\$4,680	\$4,848	\$5,016	\$5,184	\$5,352	\$5,520	\$5,688	\$168	
	Somfy Glydea™ 60e Heavy Duty Motor	\$4,708	\$4,876	\$5,044	\$5,212	\$5,380	\$5,548	\$5,716	\$5,884	\$6,052	\$6,220	\$6,388	\$168	

Motorized Traverse System without Wood Fascia

Single Track System														
	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'	16'	per add'l ft		
BM13	BTX-DC-60 Std Motor	\$1,426	\$1,477	\$1,528	\$1,579	\$1,630	\$1,681	\$1,732	\$1,783	\$1,834	\$1,885	\$1,936	\$51	
	BTX-DC-120 Heavy Duty Motor	\$1,914	\$1,965	\$2,016	\$2,067	\$2,118	\$2,169	\$2,220	\$2,271	\$2,322	\$2,373	\$2,424	\$51	
	BTX-DCS-45 Solar Motor	\$1,713	\$1,764	\$1,815	\$1,866	\$1,917	\$1,968	\$2,019	\$2,070	\$2,121	\$2,172	\$2,223	\$51	
SM13	Somfy Glydea™ 35 Std Motor	\$1,875	\$1,938	\$2,001	\$2,064	\$2,127	\$2,190	\$2,253	\$2,316	\$2,379	\$2,442	\$2,505	\$63	
	Somfy Glydea™ 60e Heavy Duty Motor	\$2,225	\$2,288	\$2,351	\$2,414	\$2,477	\$2,540	\$2,603	\$2,666	\$2,729	\$2,792	\$2,855	\$63	
Double Track System														
BM15	BTX-DC-60 Std Motor	\$2,852	\$2,954	\$3,056	\$3,158	\$3,260	\$3,362	\$3,464	\$3,566	\$3,668	\$3,770	\$3,872	\$102	
	BTX-DC-120 Heavy Duty Motor	\$3,828	\$3,930	\$4,032	\$4,134	\$4,236	\$4,338	\$4,440	\$4,542	\$4,644	\$4,746	\$4,848	\$102	
	BTX-DCS-45 Solar Motor	\$3,426	\$3,528	\$3,630	\$3,732	\$3,834	\$3,936	\$4,038	\$4,140	\$4,242	\$4,344	\$4,446	\$102	
SM15	Somfy Glydea™ 35 Std Motor	\$3,750	\$3,876	\$4,002	\$4,128	\$4,254	\$4,380	\$4,506	\$4,632	\$4,758	\$4,884	\$5,010	\$126	
	Somfy Glydea™ 60e Heavy Duty Motor	\$4,450	\$4,576	\$4,702	\$4,828	\$4,954	\$5,080	\$5,206	\$5,332	\$5,458	\$5,584	\$5,710	\$126	



BTX[®]
HOME MOTION by
Somfy[®]

HARDWARE		PO Number	Side Mark	Ship via
Company Information		Shipping Information		
Company Name	Acct #	Company Name	Acct #	
Contact Person		Contact Person		
Street Address		Street Address		
City	State	City	State	ZIP
Email		Email		
Phone	Fax	Phone	Fax	

Specified custom cut length indicates track length including drive gears; fascia will be 1/4" longer at each end of track (1/2 total), mitered fascia will be 1 1/2" longer at each end of track (3" total).

[illegible][illegible]

* BTX-DC-60 and BTX-DC-120 Systems available in continuous lengths up to 20'; spliced lengths up to 40'
BTX-DCS-45 Systems available in continuous lengths up to 18'
Somty Glydea 35 Systems available in continuous lengths up to 20'; spliced lengths up to 32'
Somty Glydea 60e Systems available in continuous lengths up to 20'; spliced lengths up to 36'
If you need more than the maximum spliced length for a system, two one-way systems can butt against each other behind fascia. Must be specified.
** *Ripplefold® style carriers incur a 10% upcharge per track; must specify carrier fullness.*

PTH Perfect Match™	
Color #	Color Name
Highlights	Sheen Level
☐ Gold ☐ Silver	☐ High-Gloss ☐ Eggshell

SPECIAL INSTRUCTIONS